Specifications Meridian 36 Modern

MAJESTIC

Meridian 36 Modern


Direct Vent Gas Fireplace

Scan QR code for installation manual for final dimensions and requirements.





ACTUAL DIMENSIONS

| FRONT WIDTH | HEIGHT | DEPTH | GLASS SIZE | BTU/HOUR INPUT |
|-------------|----------------|----------------|----------------------------------|---------------------------|
| 41" [1041] | 40-7/8" [1038] | 21-7/16" [545] | 24-3/4" x 34-1/4" [629 X 870] | 17,000 - 34,000 BTUs (NG) |




LEFT SIDE






| ERAMING | FRONT WIDTH | HEIGHT | DEPTH | WEIGHT |
|-----------------------|-------------|----------------|-----------|----------------|
| FRAMING DIMENSIONS | 42" [1067] | 40-1/8" [1019] | 22" [559] | 163lbs [74KGs] |



Adjust framing dimensions for interior chase sheathing (such as sheetrock)


BASIC CORNER INSTALLATION

Reference install manual for additional venting scenarios




Specifications Meridian 36 Modern


COMBUSTIBLE MANTEL PROJECTIONS

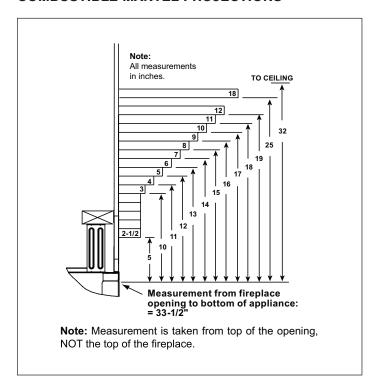


NON-COMBUSTIBLE MANTEL PROJECTIONS

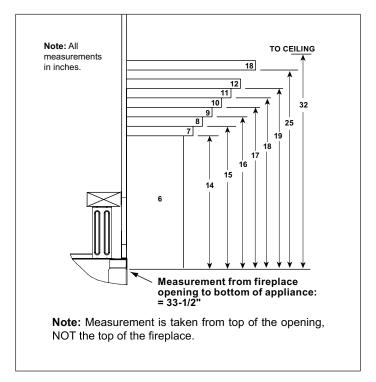

COMBUSTIBLE MANTEL LEGS OR WALL PROJECTIONS

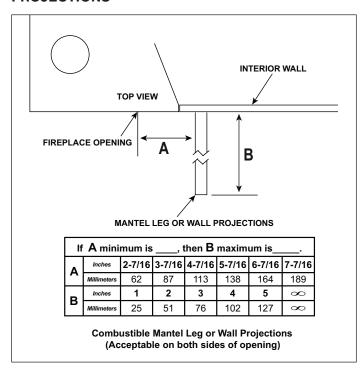


NON-COMBUSTIBLE MANTEL LEGS OR WALL PROJECTIONS

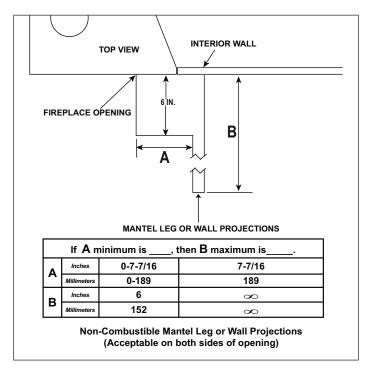

If using heat management please refer to the fireplace installation manual for framing guidelines and reduced mantel clearances. Additional information on venting, TV clearances, finishing requirements, fronts, etc can be found in the installation and owner's manual

Specifications Meridian 36 Modern

EXTERIOR CHASE MINIMUM HEIGHT REQUIREMENTS

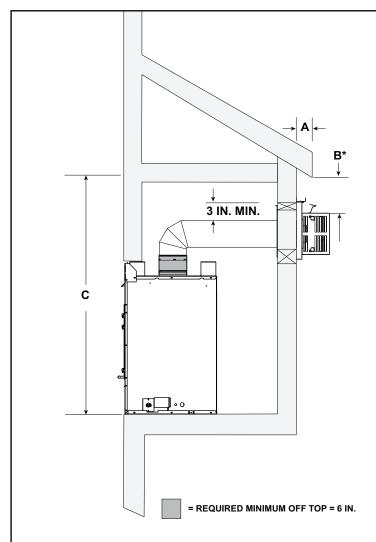


- * NOTE: If overhang is less than 2 inches, clearance from top of termination cap to bottom of overhang may be 0 inches.
- A Measured from back of vent cap to end of overhang
- B Measured from bottom of overhang to top of termination cap
- C Measured from bottom of appliance to combustible surface

Vinyl Siding Shield (TRAP-VSS) Information TRAP-VSS <u>required</u> if overhang (A) is greater than 3 inches but less than 5 inches and B dimension is less than 18 inches.

TRAP-VSS recommended if either of the below is true:

- Overhang (A) is less than 5 inches (to combat water infiltration)
- A vinyl overhang is present

WALL PENETRATION

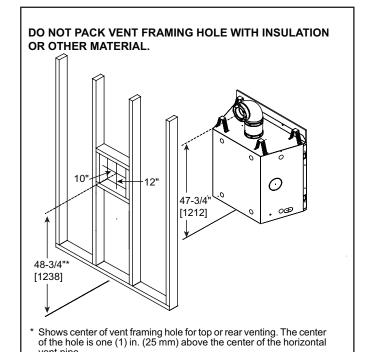

| PRODUCT LISTING CODES | | | |
|-----------------------|------------------|--|--|
| US | ANSI Z21.88-2019 | | |
| CAN CSA 2.33-2019 | | | |
| C UL US LISTED | UL307B | | |

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.



Majestic — A Brand of Hearth & Home Technologies 7571 215th Street West | Lakeville, MN 55044 877-486-9123 | majesticproducts.com | majesticproducts.ca

